

# LGMG

## M0407TE

### VERTICAL MAST LIFTS

- Narrow chassis, low stowed height, can be transported easily through doorways and in passenger elevators.
- Small inside turning radius allows for flexible use in narrow spaces, improving work efficiency.
- Three-stage integrated telescopic oil cylinder, reliable and durable.
- Intelligent self-diagnostic system for quick troubleshooting.



# LGMG Vertical Mast Lifts

## SPECIFICATIONS

MODELS	M0407TE ( M1230TE )	
Measurements	Metric	Imperial
Working Height Max.	5.7m	18'8"
Platform Height(Raised)	3.7m	12'2"
Platform Size	1.33x0.75m	52"x30"
<b>A</b> Overall Length	1.39m	4'7"
<b>B</b> Overall Width	0.76m	2'6"
<b>C</b> Overall Height (Stowed)	1.69m	5'6"
<b>D</b> Wheelbase	1.04m	3'5"
<b>E</b> Ground Clearance (Stowed)	68mm	3"

### PRODUCTIVITY

Max. Platform Occupants	1(in) / 0(out)	
Platform Capacity	230kg	507 lbs
Drive Mode	Front wheels drive	
Drive Speed (Stowed)	4km/h	2.5mph
Drive Speed (Rised)	0.5km/h	0.31mph
Gradeability	25%	25%
Tire Size	323x100mm	13"x4"
Ground Pressure, Tyres	814 kPa	118.1 psi

### POWER

Power Source	24V (2x12V),145Ah,AGM
--------------	-----------------------

### WEIGHT


Machine Weight (CE)	790kg	1,742 lbs
---------------------	-------	-----------

### STANDARD FEATURES

Proportional control	Emergency stop device
Horn/Hour meter	Manual brake release
Double swing gate	Charging protection system
Emergency descent	Descent alarm with flashing beacon
Pothole guard	Front wheel brake
Full-height drive	Front wheel steering, front wheel drive
Tilt alarm	Telematics connector
Platform tool box	Solid non-marking tires

### OPTIONAL

AC power to platform	Biodegradable hydraulic oil
Telematics	

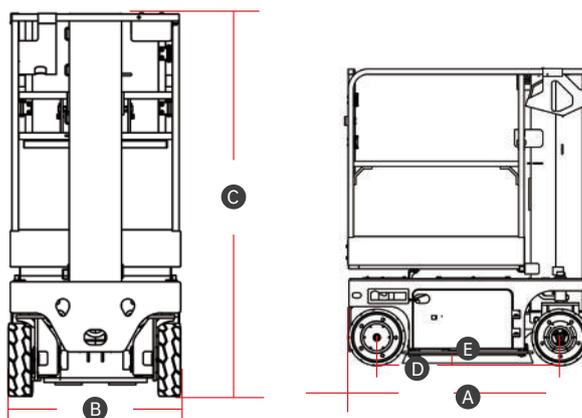

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

### LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
 Email: sales@lmgm.com.cn Tel: +86 531 6787 9283

### LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
 Email: sales@lmgmeurope.com Tel: +31 850 642 777

### LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
 Email: sales@lmgmna.com Tel: +1 833 288 5464

www.lmgmlifts.com




**LGMG**  
 RELIABILITY IN ACTION

# LGMG

## M0810JE

### VERTICAL MAST LIFTS

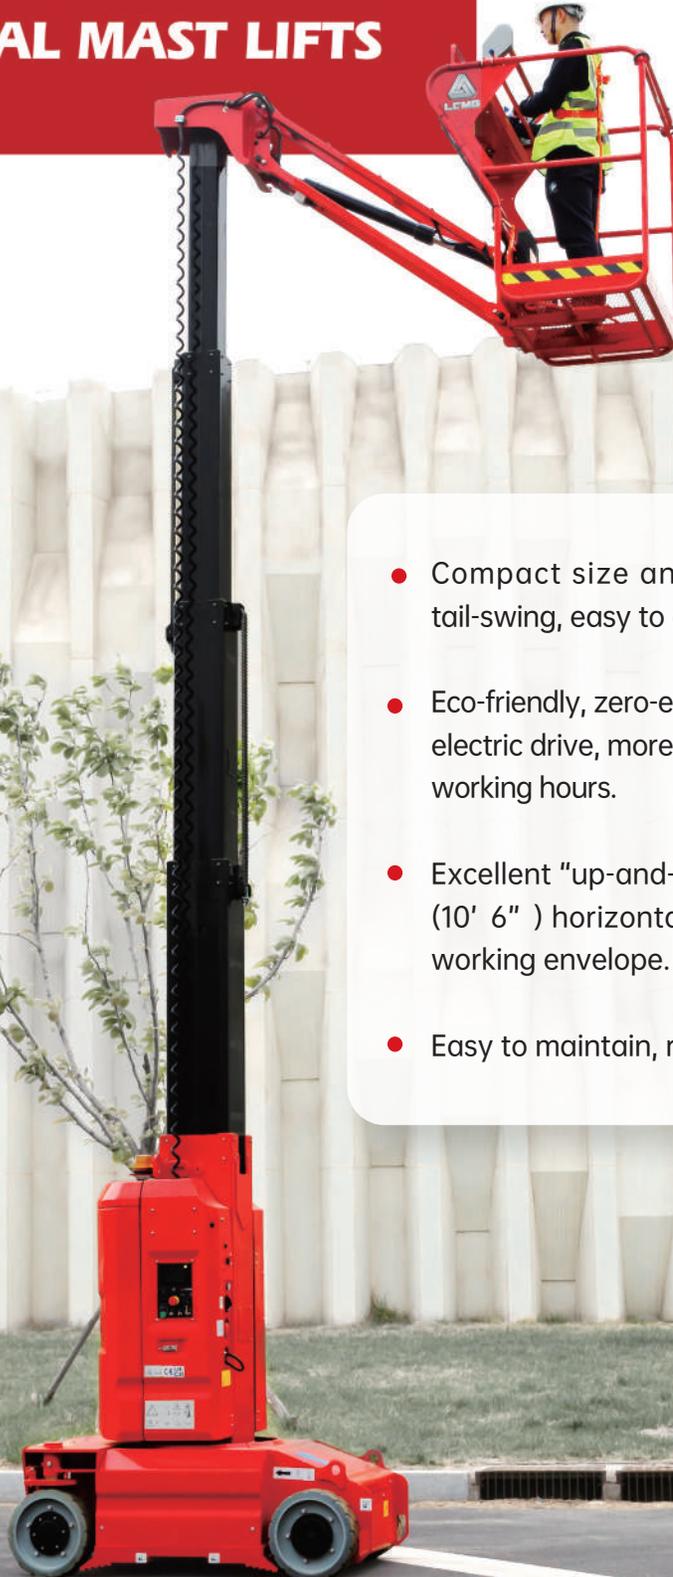

- Compact size and light-weight, zero tail-swing, easy to operate and transport.
- Eco-friendly, zero-emission, highly efficient electric drive, more productive with longer working hours.
- Excellent "up-and-over" capability, 3.2m (10' 6" ) horizontal outreach and larger working envelope.
- Easy to maintain, reducing cost.

# LGMG Vertical Mast Lifts

## SPECIFICATIONS

MODELS	M0810JE ( M2640JE )	
Measurements	Metric	Imperial
Working Height Max.	10m	32'10"
Platform Height(Raised)	8m	26'3"
Horizontal Outreach	3.2m	10'6"
Up and Over Clearance Max.	6.6m	21'8"
Platform Size(L×W)	0.98x0.72m	39"x28"
<b>A</b> Overall Length	2.6m	8'6"
<b>B</b> Overall Width	1m	3'3"
<b>C</b> Overall Height(Stowed)	1.99m	6'6"
<b>D</b> Wheelbase	1.2m	3'11"
<b>E</b> Ground Clearance	0.1m	4"

### PRODUCTIVITY

Max. Platform Occupancy	2 (in) / 1 (out)	
Platform Capacity	200kg	440 lbs
Drive Mode	Rear-Wheels Drive	
Brakes	Rear-Wheels Brake	
Turntable Rotation	345°	345°
Max. Drive Speed (Stowed)	3.5km/h	2.2mph
Max. Drive Speed (Raised)	0.43km/h	0.27mph
Gradeability	25%	25%
Tailswing	0	0
Tire Size	380x130mm	15"x5"
Ground Pressure, Tyres	1,353 kPa	196.2 psi

### POWER

Power Source	24V,250Ah,FLA
--------------	---------------

### HYDRAULIC SYSTEM

Hydraulic Oil Capacity	6.5L	1.7gal
------------------------	------	--------

### WEIGHT


Machine Weight (CE/ANSI)	2,720kg	5,997 lbs
--------------------------	---------	-----------

### STANDARD FEATURES

Proportional control	Emergency stop device
Horn/Hour meter	Charge protection system
Full-height drive	Manual emergency pump
All motions alarm	Telematics connector
Brake release	Descent alarm with flashing beacon
Emergency descent	Solid non-marking tires
Tilt alarm	

### OPTIONAL

AC power to platform	Anti-collision protection
Telematics	Biodegradable hydraulic oil

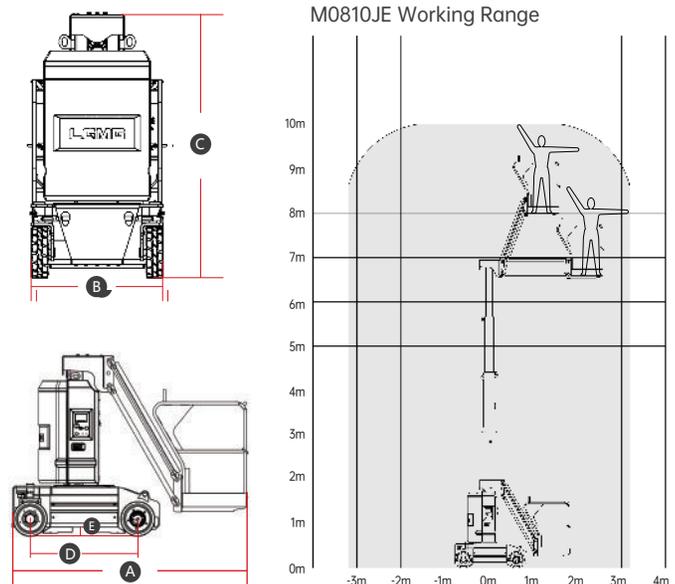

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

### LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China  
 Email: sales@lmg.com.cn Tel: +86 531 6787 9283

### LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands  
 Email: sales@lmg-europe.com Tel: +31 850 642 777

### LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
 Email: sales@lmgna.com Tel: +1 833 288 5464

www.lmg-lifts.com



**LGMG**

RELIABILITY IN ACTION